

Phone : 2555-4562

**MAHARAJA MANINDRA CHANDRA GROUP OF COLLEGES
CO-ORDINATION COMMITTEE**

20, RAM KANTO BOSE STREET
KOLKATA - 700 003

Ref. No.

Dated... 09.09.2019

TENDER NOTICE

Sealed tender are invited from Licensed Contractor to construct a semi-underground water reservoir (as per the attached plan & estimate) within 15 days from publication of this notice to the convener of M.M.C. Group of colleges.

The total estimated cost of the project is Rs. 1,66,663/-

EMD: Rs. 10,000/- payable by DD in favour of Convener, Coordination Committee M.M.C. group of Colleges.

For further query, please contact the Principal, M.M.C. College, contact no. 9477327558.



Convener
Co-ordination Committee
M.M.C. Group of Colleges
Kolkata-3
Convener
Co-ordination Committee
M.M.C. Group of Colleges, Kolkata-3

DETAILS OF APPROXIMATE ESTIMATE OF SEMI UNDER GROUND WATER RESERVOIR



SL.NO.	ITEM	QUAN TITY	UNIT	BROAD SPECTIFICATION	MARKET RATE	COST
					INR	INR
1	EW	17	Cu.M.	Earth work	1850	31450
2	BFS	14	Sq.M	75 mm thick	700	9800
3	P.C.C.	14	Sq.M	(1:3:6) proportion	412.5	5775
4	BRICK WALL (HALF)	25	Sq.M	125 mm thick (1:4)	800	20000
5	R.C.C.	5.8	Cu.M.	(1:2:4) proportion	6800	39440
6	STEEL	502	Kg	10 dia tor	54	27108
7	INTERIOR PLASTER	30	Sq.M	15 mm thick (1:4)	270	8100
8	NEAT CEMENT PUNNING	30	Sq.M	Internal water proofing	75	2250
9	EXTERNAL PLASTER	29	Sq.M	19 mm thick(1:4)	360	10440
10	MHC	3	Nos	C.I. manhole cover	1150	3450
11	EW FILLING	8.5	Cu.M.	Earth filling & levelling	750	6375
12	NEAT CEMENT PUNNING	29	Sq.M	External water proofing	75	2175
13	INLET COUPLING	2	Nos	3"-dia	150	300
						166663
	(RUPEES ONE LAKH SIXTY SIX THOUSAND SIX HUNDRED SIXTY THREE ONLY)					EXCLUSIVE TAX & GST.

Suvendu Das

SUVENDU DAS

B.Tech (Civil), M.I.G.S., I.C.W.A. (I)

Consultant Civil Engineer

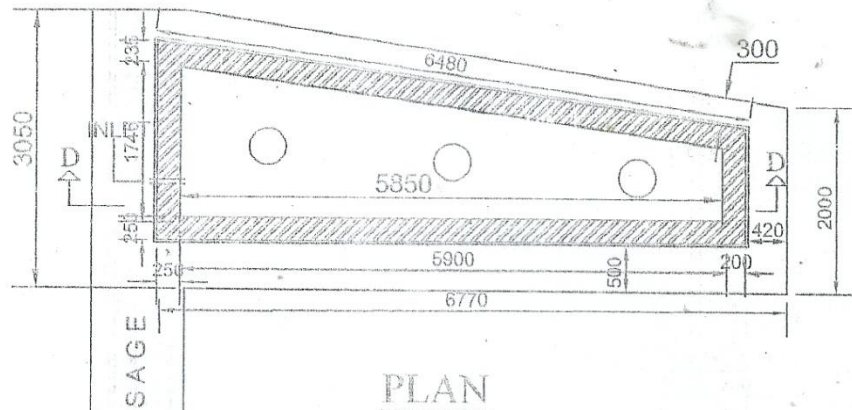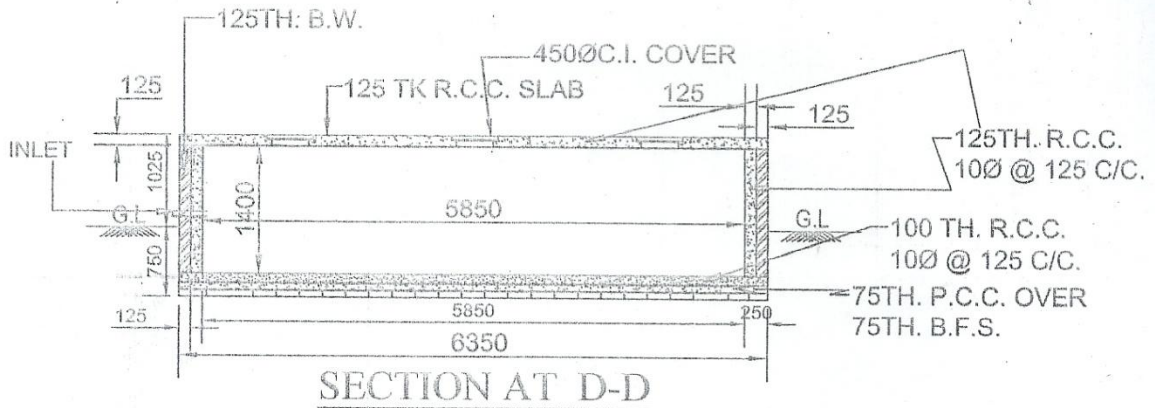

**DETAILS OF SEMI-UNDER GROUND
WATER RESERVOIR
CAPACITY - 9380 LTS.(APPROX).**

SCALE -1:00

Suvendu Das
SUVENDU DAS

B.Tech (Civil), M.I.G.S., I.C.W.A. (I)
Consultant Civil Engineer